


**FRONT AXLE**

**DRIVE SHAFTS**

The joint-to-joint distance of the drive shaft (dimension A in the illustration) has been revised.

Item		EVOLUTION-VI	Base vehicle (EVOLUTION-V)
Joint-to-joint distance (dimension A) mm	LH side	352	365
	RH side	429	442

iv  
348  
418

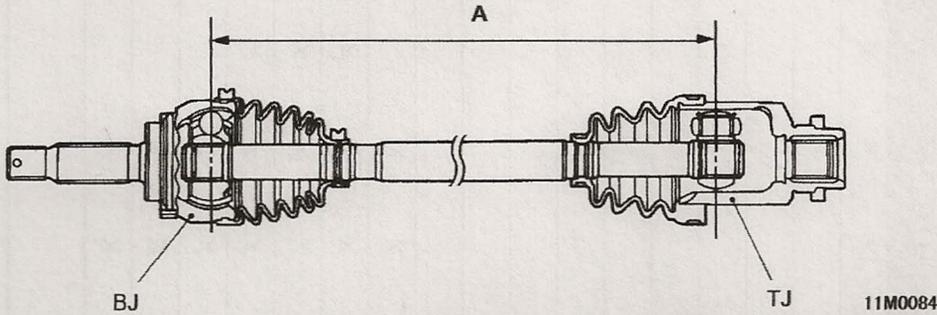

**FRONT HUB**

Induction hardened front hubs which were installed optionally on RS to be put in competitions have been replaced by non-induction hardened front hubs (same ones as used in GSR).

For customers having the will to enter a competition, however, induction hardened front hubs are still available as service parts.

<EVOLUTION-V>

**DRIVE SHAFTS**

In accordance with the wider tread, the joint-to-joint distances (see dimension "A" in the drawing) have been increased as shown in the following table.

Item		EVOLUTION-IV	EVOLUTION-V
Joint-to-joint distance (mm)	Right-hand side	418	442
	Left-hand side	348	365

